


**ELECTROPHORESIS MEMBER AND ELECTROPHORESIS DEVICE USING SAME**

Patent number: JP11183437  
Publication date: 1999-07-09  
Inventor: INOUE SHINJI; NAKANISHI HIROAKI  
Applicant: SHIMADZU CORP  
Classification:  
- International: G01N27/447  
- european:  
Application number: JP19970365831 19971222  
Priority number(s): JP19970365831 19971222

Report a data error here

**Abstract of JP11183437**

**PROBLEM TO BE SOLVED:** To enable the highly accurate measurement of a trace sample in a capillary part. **SOLUTION:** Potential differences are provided for both ends of a channel groove 53 for separation filled with a liquid for electrophoresis to cause a sample to migrate. An insulating film/semiconductor interface formed of a silicon nitriding film 29 and a silicon substrate 21b formed so as to cover the channel groove 53 for analysis is irradiated with light modulated into a predetermined frequency form the side of the silicon substrate 21b by a laser light source 47 and is, for example, impressed with a bias voltage  $V$  of 1 V by a voltage impressing power source 51, and a generated optical a.c. current  $I$  is measured by an optical a.c. current measuring device 49. As a result, it is possible to detect changes in the pH values of a capillary part irradiated with laser light as changes in the optical a.c. current  $I$ , and it is possible to detect even a trace sample without impairing detection sensitivity.

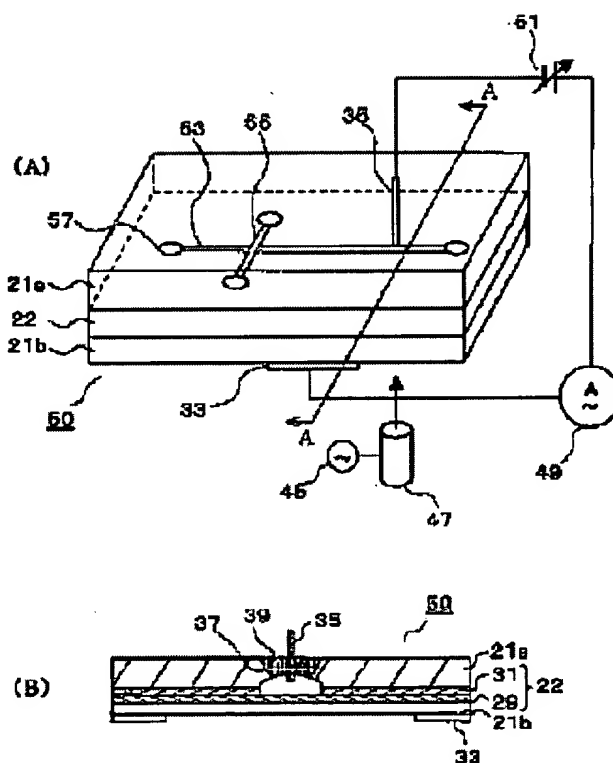

Data supplied from the esp@cenet database - Worldwide

**BEST AVAILABLE COPY**

**THIS PAGE BLANK (USPTO)**